
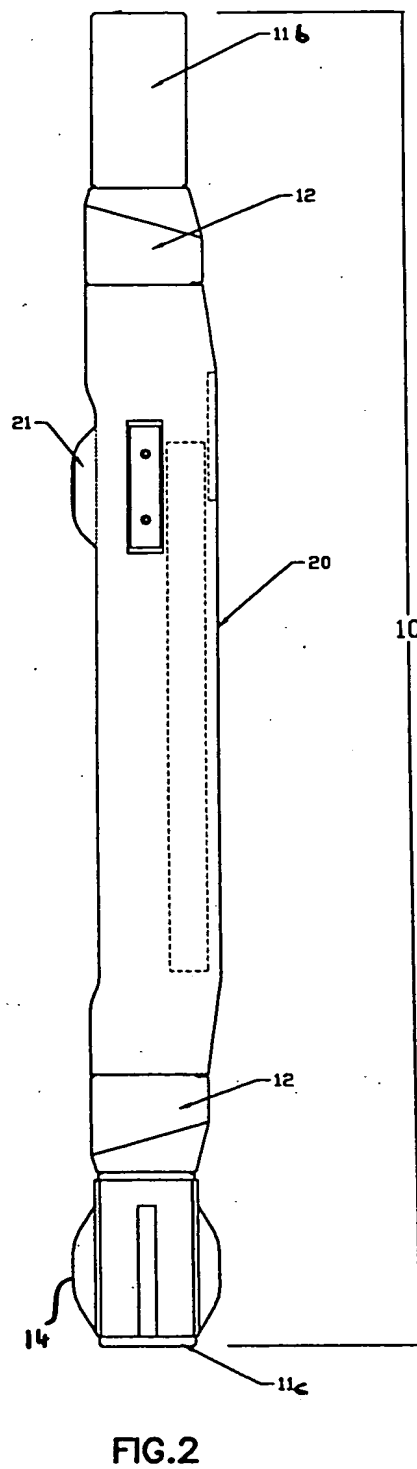


This diagram shows a perspective view of a cable assembly 10. The assembly consists of a central core 11 surrounded by a braided shield 12. The core 11 includes a central conductor 13 and multiple twisted pairs 14. The entire assembly is encased in an outer jacket 15. Sectional views are indicated by arrows A-A and B-B.

FIG. 1

2/13

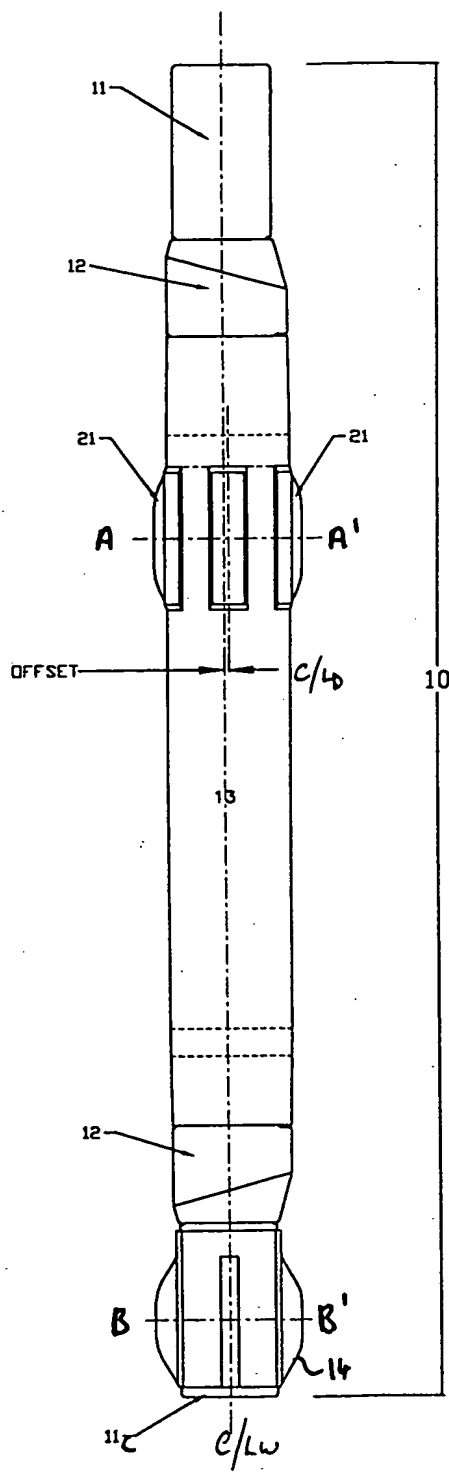

3/13

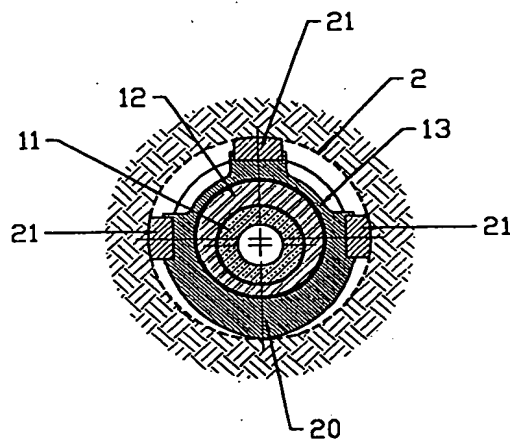


FIG. 4




FIG. 4A

A/13

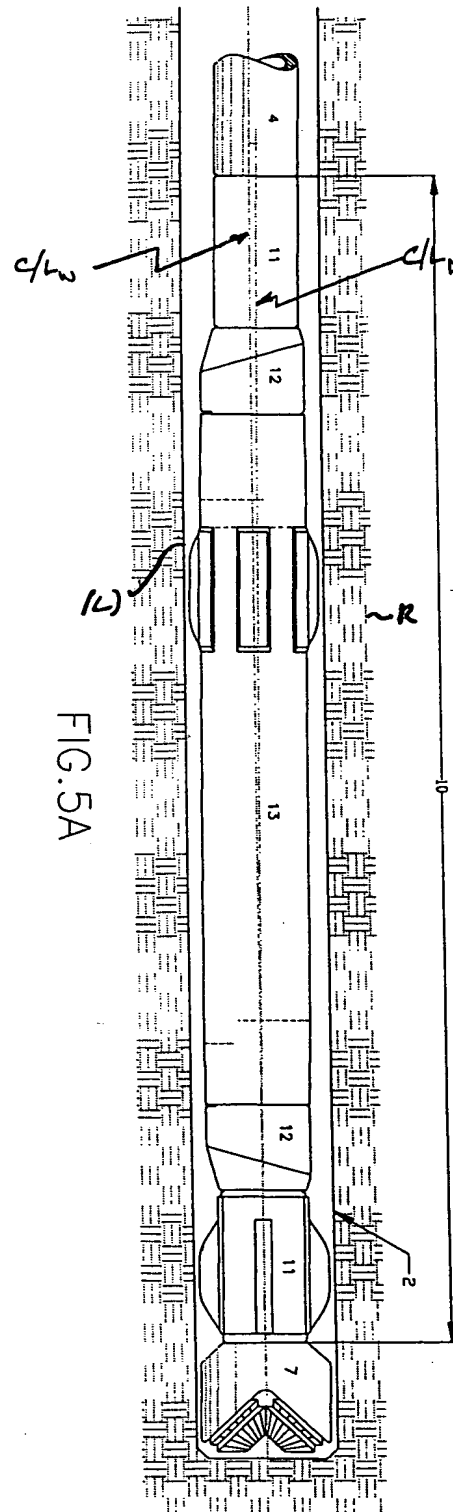


FIG. 5A

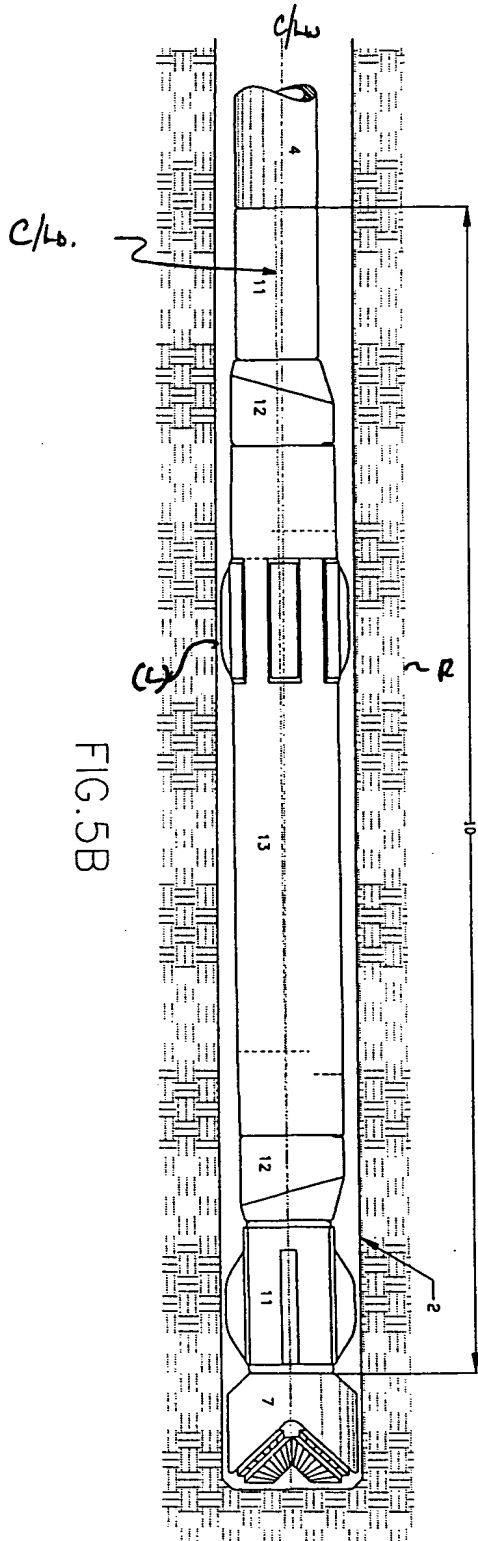


FIG. 5B



6/13

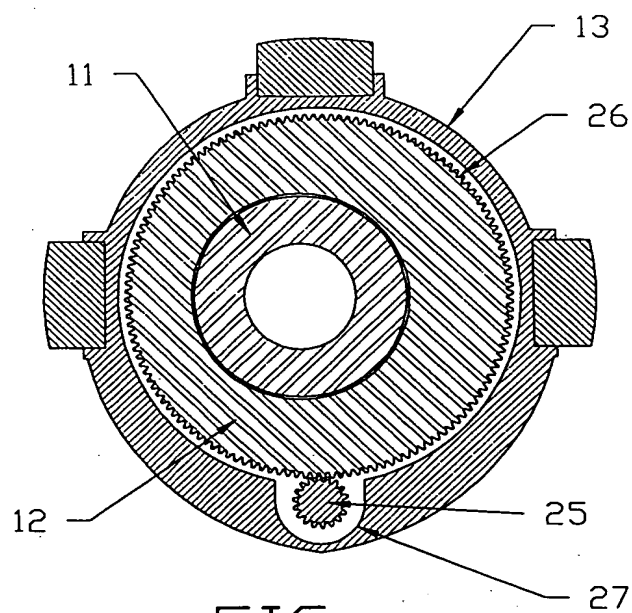


FIG. 7A

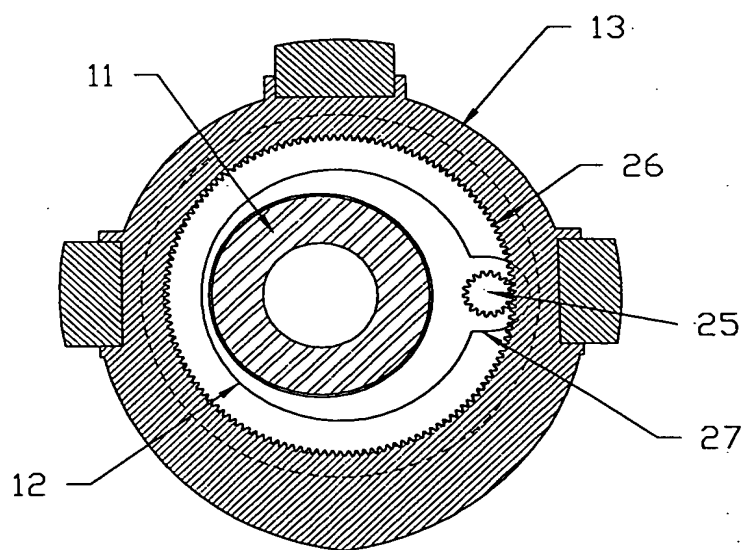


FIG. 7B

09878745-100504

7/13

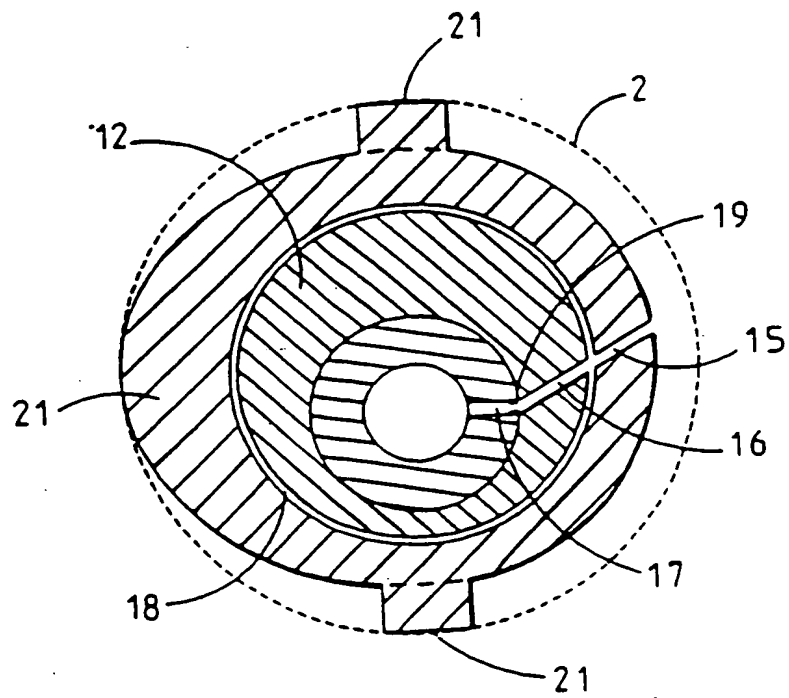


FIG. 8

09878715-100501

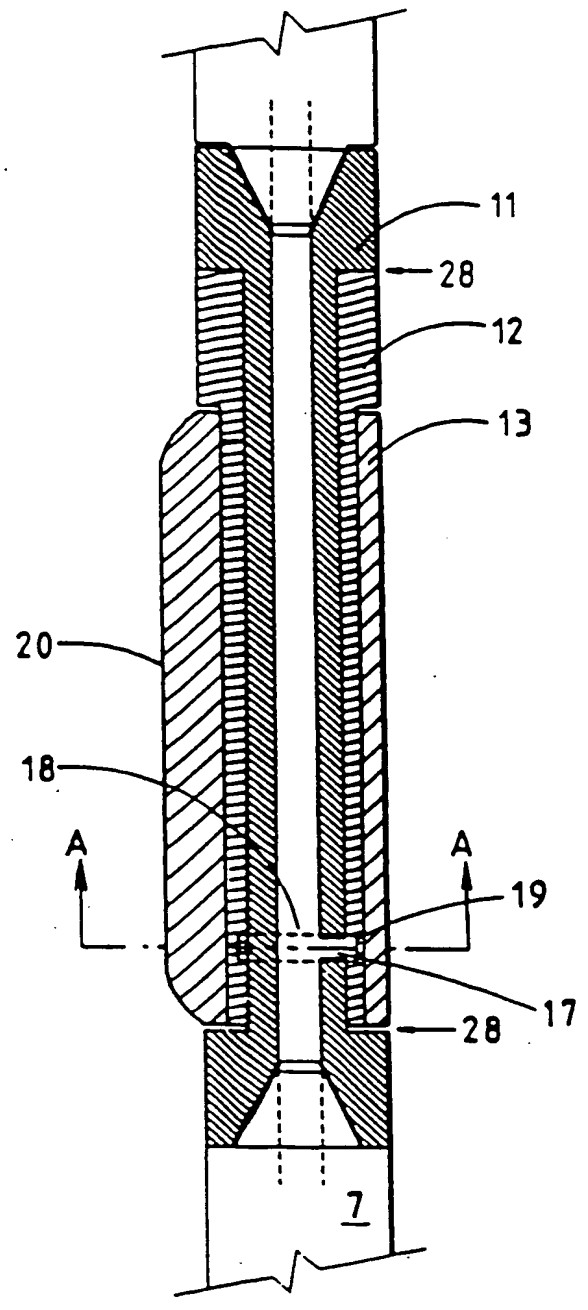


FIG. 9

09878715-100501




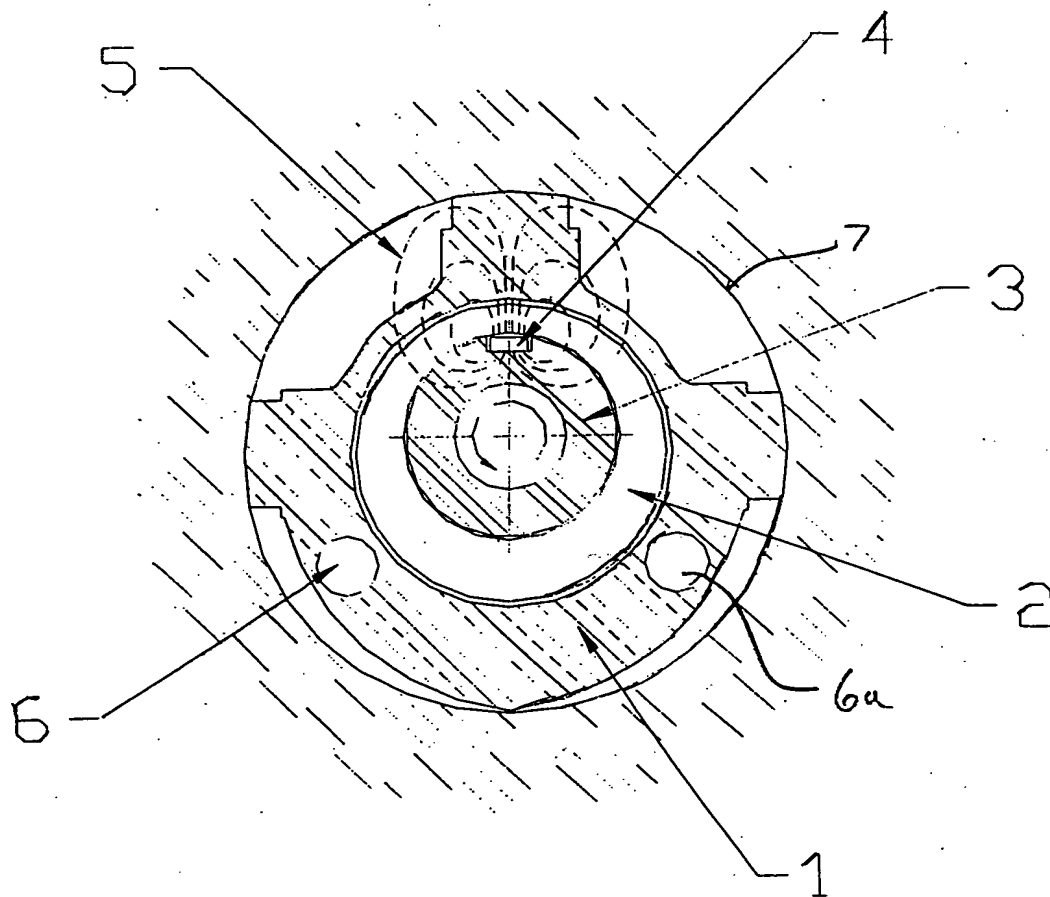


FIG. 10




10/13

09878715-100504

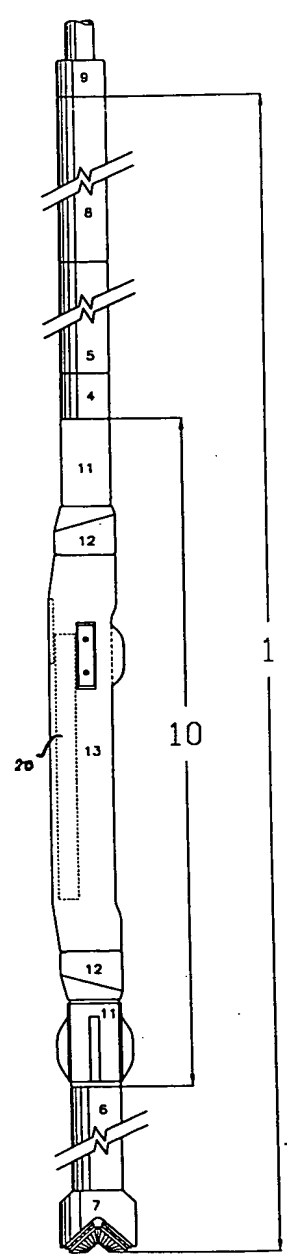

11/13

105001-51282860

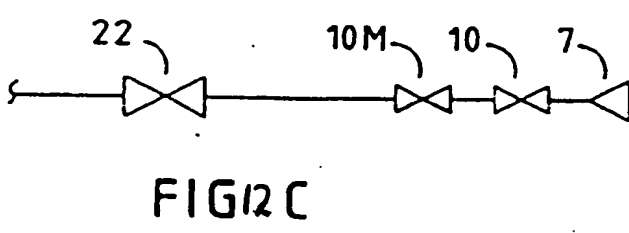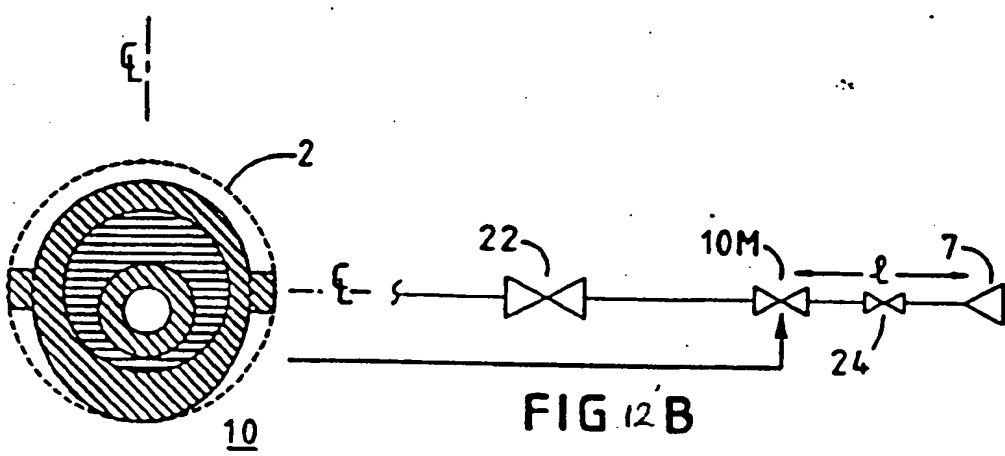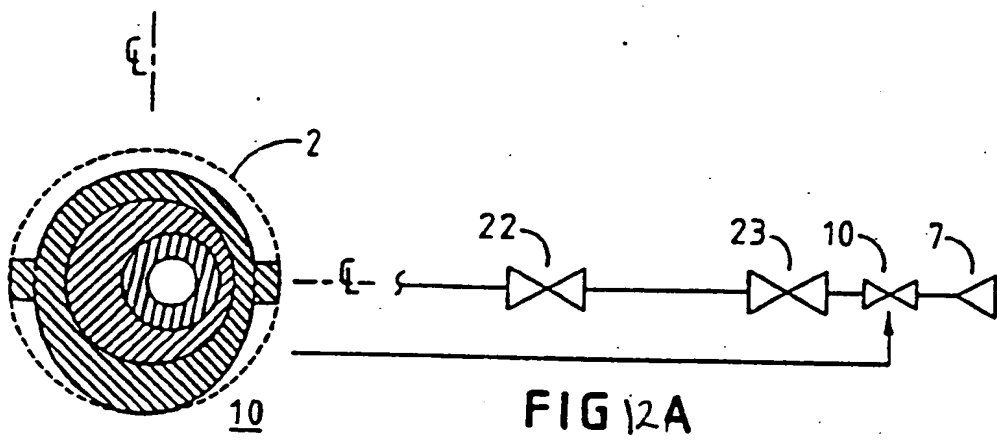

12/13

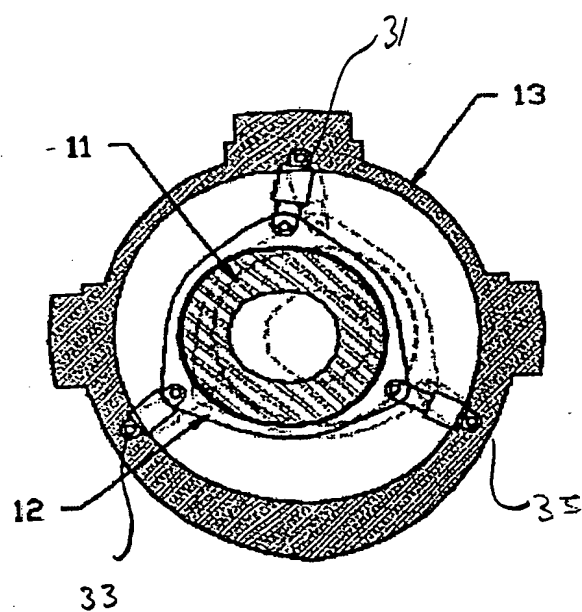


FIGURE 13

